## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

#### (19) World Intellectual Property Organization International Bureau





(43) International Publication Date 10 February 2005 (10.02.2005)

PCT

### (10) International Publication Number WO 2005/012176 A1

(51) International Patent Classification7: C01B 33/193, 33/18

(21) International Application Number:

PCT/IB2004/002541

(22) International Filing Date: 30 July 2004 (30.07.2004)

(25) Filing Language:

English


(26) Publication Language:

English

(30) Priority Data: 2003-286635

5 August 2003 (05.08.2003)

- (71) Applicant (for all designated States except US): DSL JAPAN CO. LTD [JP/JP]; 12F Shinjuku Monolith, 2-3-1 Nishi-Shinjuku, Shinjuku-ku, Tokyo 163-0938 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): NISHI, Shugo [JP/JP]; 1-3, Kuise Terajima, 2-Chome, Amagasaki City, 660-0813 Tokyo (JP). TOKUNAGA, Tatsuya [JP/JP];
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

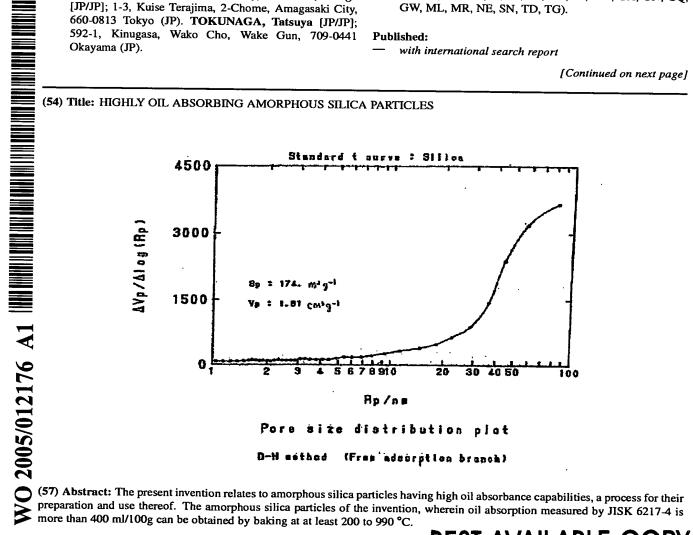

preparation and use thereof. The amorphous silica particles of the invention, wherein oil absorption measured by JISK 6217-4 is more than 400 ml/100g can be obtained by baking at at least 200 to 990 °C.

# WO 2005/012176 A1

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.